




OX Engineered Products  
22260 Haggerty Road Suite 365  
Northville, MI 48167  
p. 1.800.345.8881  
f. 248.289.9955  
oxep.com

## seam**TAPE**

HomeGuard® SeamTape® is a polypropylene sheathing tape coated with an aggressive acrylic pressure sensitive adhesive (PSA) designed for use as a closure system and vapor seal on all interior and exterior sheathing materials. HomeGuard® SeamTape® is the highest performing, highest value product on the market today. Available in white, 1 7/8" x 165', and 2 7/8" x 165'

Printed in the USA 



---

### Usage

For use with HomeGuard HouseWrap, Titan Drainage Wrap, Ox products and other leading housewrap brands

### Application

Installs and performs well over wide temperature ranges.


### Available

White  
1 7/8" x 165'  
2 7/8" x 165'

## Attributes

- High performance sheathing tape installs and performs well over wide temperature ranges.
- Excellent vapor barrier tape on polyethylene film
- Performs well as a seam tape on extruded foam products such as Styrofoam® and Foamular®
- Applies to all major housewraps including Tyvek® and Typar®
- Great for use as a sealing tape on DensGlass Gold® and other sheathing brands.

## Installation

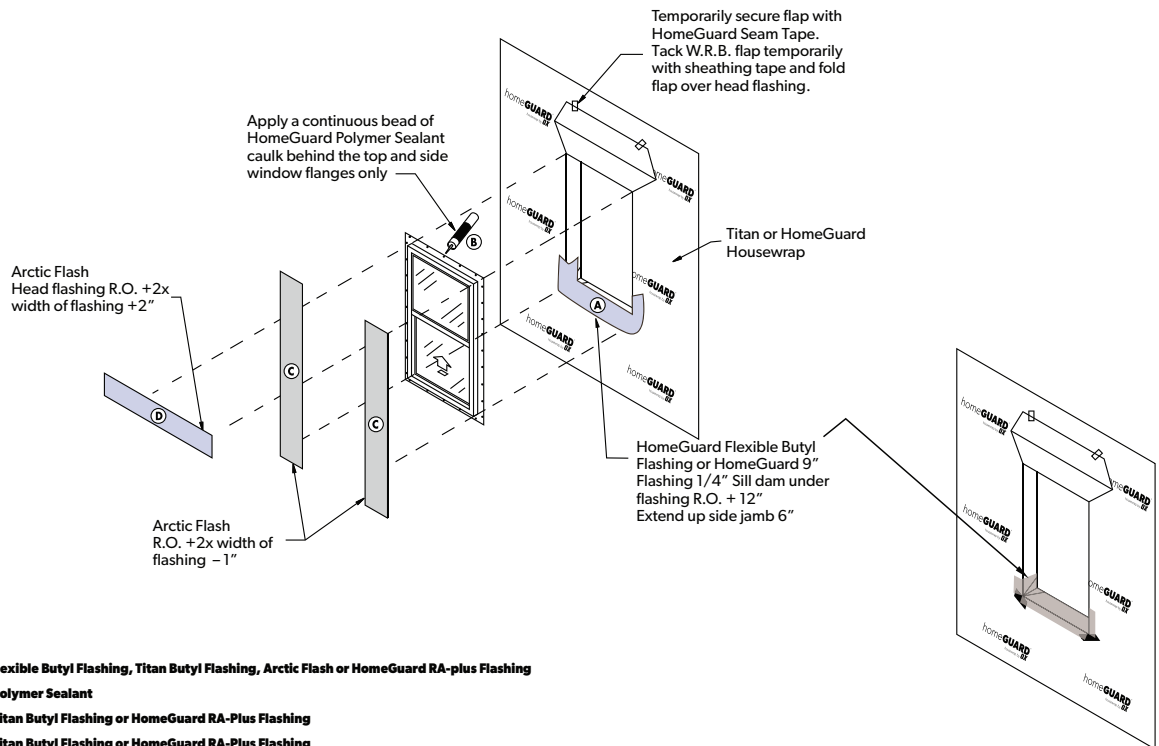

- A. HomeGuard Flexible Butyl Flashing, Titan Butyl Flashing, Arctic Flash or HomeGuard RA-plus Flashing**
- B. HomeGuard Polymer Sealant**
- C. Arctic-Flash, Titan Butyl Flashing or HomeGuard RA-Plus Flashing**
- D. Arctic-Flash, Titan Butyl Flashing or HomeGuard RA-Plus Flashing**

## Technical Data for HomeGuard Seam Tape

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.0 mils	0.08 mm	PSTC-133
Peel Adhesion			
to stainless steel	45 oz/in	12.5 N/25 mm	PSTC-101
to polyethylene	16 oz/in	4.5 N/25 mm	PSTC-101
to Tyvek	25 oz/in	6.9 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	20 lb/in.	90.4 N/25 mm	PSTC-131
Elongation	130%	130%	PSTC-131
WVTR	0.061 perms		ASTM E96
Application Temperature	-4° to 105° F	-20° to 41° C	