

SMART-BIT® FOR FIBER CEMENT BOARD

Pre-drilling and Countersinking Tool for Fiber Cement Board

STARBORN®

IDEA DRIVEN PRODUCTS

Deck Screws, Drilling Tools,
Construction Fasteners.

800-596-7747

starbornindustries.com




Patented.

SMART-BIT® FOR FIBER CEMENT BOARD

Pre-drilling and Countersinking Tool For
Fiber Cement Board

The **Smart-Bit for Fiber Cement Board** is a tungsten carbide tipped pre-drilling and countersinking tool. Like other products in the Smart-Bit line, it is designed to create a perfect hole and fit for matching fasteners. The Smart-Bit for Fiber Cement is the first tool that makes it possible to pre-drill and countersink in one step at a consistent depth, without damaging the work surface. The Smart-Bit tool features a free spinning stop collar, which controls the depth of the drill and countersink. The stop collar is fitted with a rubber O-ring to prevent surface damage or marking.

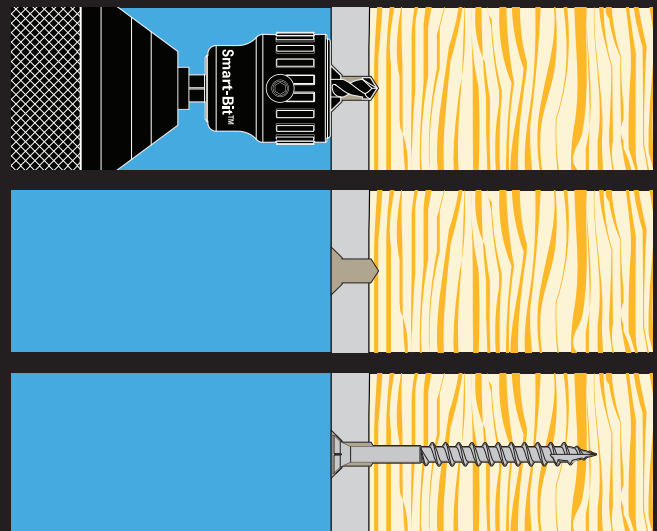


SMART-BIT FOR FIBER CEMENT BOARD FEATURES

FREE-SPINNING STOP COLLAR WITH O-RING

The Smart-Bit stop collar spins free of the drill bit, preventing surface damage or marking. When the stop collar stops spinning, the hole is complete.

TUNGSTEN CARBIDE TIPPED DRILL BIT

Tungsten carbide tips on the drill bit, as well as the countersink, remain sharp after extended use. Each package contains two different length drill bits, for use with different thicknesses of compressed fiber cement board. Bits can be easily changed by loosening the tool's set screw.

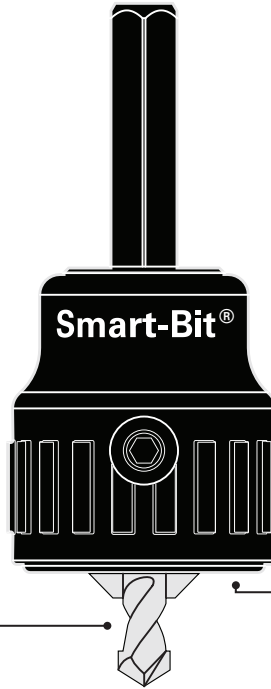

ANTI-CLOG DEBRIS CAVITY

The Smart-Bit debris cavity gathers waste material, keeping it clear of the countersink, unlike conventional flush mounted countersinks. The waste simply falls out of the tool after each hole is completed.

PRE-SET SHAFT LENGTH

Together with the countersink, the overall hole depth is calibrated for use with either 5/16" (9mm) or 5/8" (18mm) thick fiber cement board, depending on which included drill bit is used. Installed fasteners sit slightly below the board surface, leaving room for resin that may be applied on top of the screw in some applications.

DIMENSIONS

TOOL SIZE Gauge (mm)	HEAD STYLE	DRILL BIT mm (inch)	COUNTERSINK DIA. mm (inch)	COUNTERSINK ANGLE	HOLE DEPTH* mm (inch)
#10 (5.0 mm)	Flat	6.2 (1/4")	12.2 (1/2")	82°	11 (7/16") / 17 (11/16")

*Overall hole depth including countersink portion. The tool package includes two different length bits, designed for use with either 5/16" (9mm) or 5/8" (18mm) fiber cement board.

PRICING

ITEM #	UPC	DEALER PRICE PER BLISTER	DEALER PRICE PER SLEEVE (6 BLISTERS)
BDA446L	09938505628-3		

Note: Sold as sleeves (6 blisters per sleeve)

PACK

