


Frameless Glass Top Mount Installation Instructions



READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION: It is the responsibility of the installer to meet all code and safety requirements, and to obtain all required building permits. The railing installer should determine and implement appropriate installation techniques for each installation situation. VISTA Railing Systems Inc, its distributors and dealers shall not be held liable for improper or unsafe installations. VISTA Railing Systems posts must always be secured to the sub structure and should never be attached to only the surface material (i.e. deck board). Failure to follow all of these instructions could result in serious injury or death.


Installing Posts:

1. Locate posts in desired locations, ensuring all posts are plumb and level.
2. Maintain a maximum of 4ft (from center to center of posts).
3. Measure distance between posts and add $1 \frac{3}{8}$ " to total measurements. (Ex.: If inside post to inside post measurement equals 45"... $45" + 1 \frac{3}{8}" = 46 \frac{3}{8}"$, you will need to order $46 \frac{3}{8}" \times 40"$ high with polished edges). You will need to order 10mm or $\frac{3}{8}"$ tempered glass.

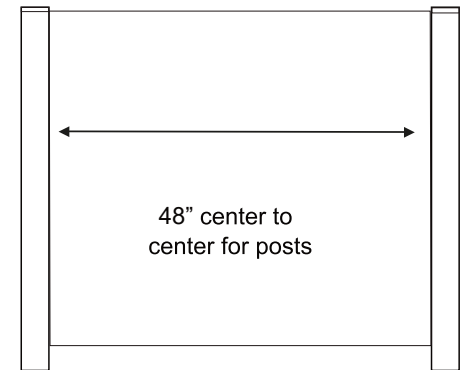

Installing Glass:

1. Lubricate black glass gasket and vertical glass edges with soapy water.
2. Using two people, slide glass down into post gaskets while maintaining even pressure on both sides until glass sits on support blocks in bottom of post. If glass is not seated properly, post caps may not fit.

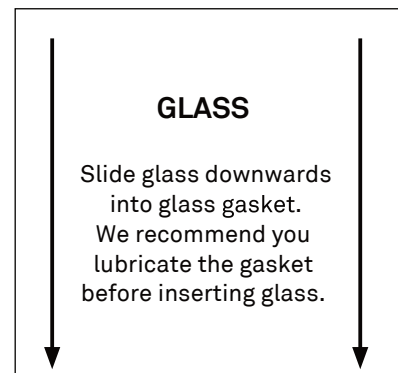

Completing Installation:

1. Insert post caps.
2. Press or tap down with a non-metallic tool.

